


Floor Standing • High Speed • Refrigerated • Centrifuge

FR10



Scan to watch product video

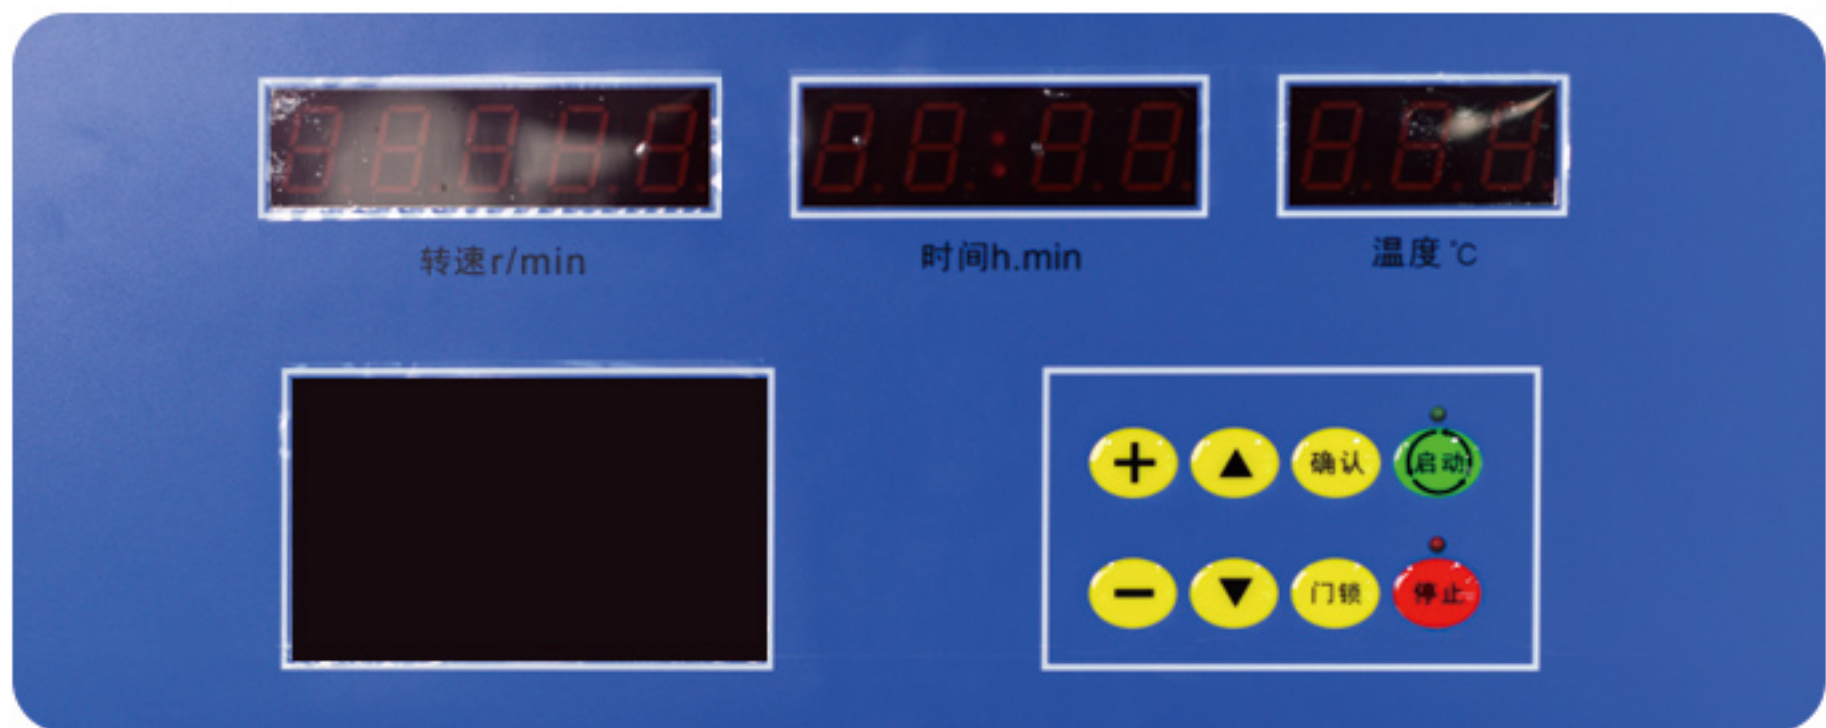


8000 rpm	Maximum Speed
11880 xg	Maximum RCF
6x1000 ml	Maximum Capacity
≤60dB (A)	Noise Level(dBA)

- * Temperature up to -20°C Celslus
- * Accuracy of ±1°C
- * RTC (Real-Time Control) Function
- * Self-Locking Rotor System
- * Automatic RFID rotor identification
- * Castor wheels for ease of mobility

Technical Specifications:

Speed accuracy	±10rpm	Motor	AC frequency conversion motor, direct drive
Temp.range (at RT 25°C)	-20°C~40°C	Screen	Touch LCD color+digital screen
Acceleration / Deceleration Rate	10	Control	advanced CPU control system
Daily use program	30	Timer range	1~99min59s
Temp accuracy	±1°C	Power supply	AC220v 50Hz 30A,6500w
Net weight	270kg	Dimension	860×730×1200mm(L×W×H)

Matched Rotors

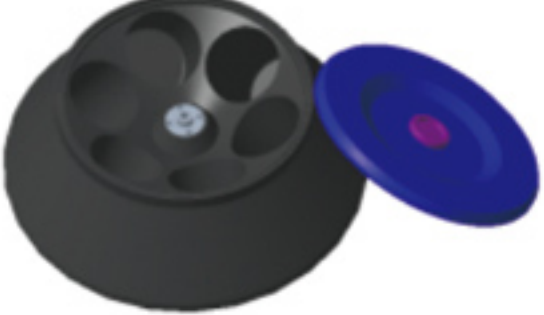No.	Rotor	Capacity	Max.speed	Max. RCF	Note
NO.1 	Fixed Angle Rotor	6×500ml	8000r/min	11880xg	PP/PC tube
NO.2 	Fixed Angle Rotor	6×1000ml	7000r/min	11630xg	PP/PC tube